



## VIS TÊTE FRAISÉE - EMPREINTE POZIDRIV -

DIN 965 A / ISO 7046 / NFE 25-119

INOX - ACIER ZINGUE  
LAITON

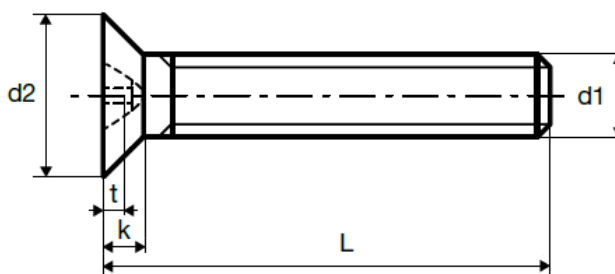

d1	M2	M2,5	M3	M4	M5	M6
d2	3,80	4,70	5,60	7,50	9,20	11
k	1,20	1,50	1,65	2,20	2,50	3
s	2,20 - PZ 1	2,50 - PZ 1	2,80 - PZ 1	4 - PZ 2	4,40 - PZ 2	6,10 - PZ 3
t	0,92 - 1,17	1,22 - 1,47	1,48 - 1,73	1,60 - 2,06	2,05 - 2,51	2,46 - 2,92
L	4	4	4	6	6	10
	5	5	5	8	8	12
	6	6	6	10	10	16
	8	8	8	12	12	20
	10	10	10	16	16	25
	12	12	12	20	20	30
	16	16	16	25	25	35
	20	20	20	30	30	40
				25	35	50
				30	40	
			35	50		
			40			
			50			